







Recommended P/N 20634-1**T-02

PART NO.	Pos.	A	B	C	D	E	F	G	H	J	K
◆20634-110T-02	10	4.10	4.65	4.30	3.60	4.40	6.66	9.40	3.40	-	-
20634-112T-02	12	5.90	5.45	5.10	4.40	5.20	7.46	10.20	4.10	-	-
20634-120T-02	20	9.10	8.65	8.30	7.60	8.40	10.66	13.40	-	5.00	-
20634-130T-02	30	13.10	12.65	12.30	11.60	12.40	14.66	17.40	4.00	8.00	4.00
20634-140T-02	40	17.10	16.65	16.30	15.60	16.40	18.66	21.40	8.00	12.00	4.00
20634-150T-02	50	21.10	20.65	20.30	19.60	20.40	22.66	25.40	12.00	16.00	4.00
20634-160T-02	60	25.10	24.65	24.30	23.60	24.40	26.66	29.40	16.00	20.00	4.00


◆MARK MEANS NOT AVAILABLE.

P/N : 20634-1**T-02
Pos.

TYPE34

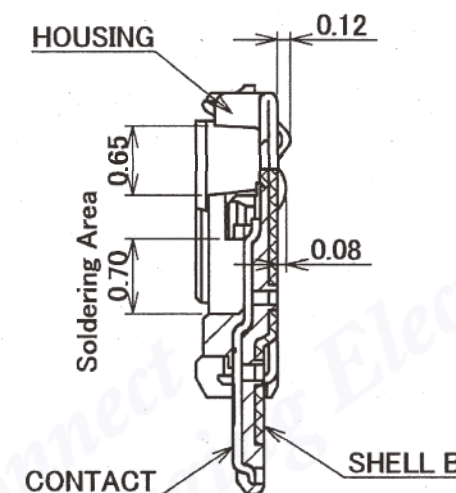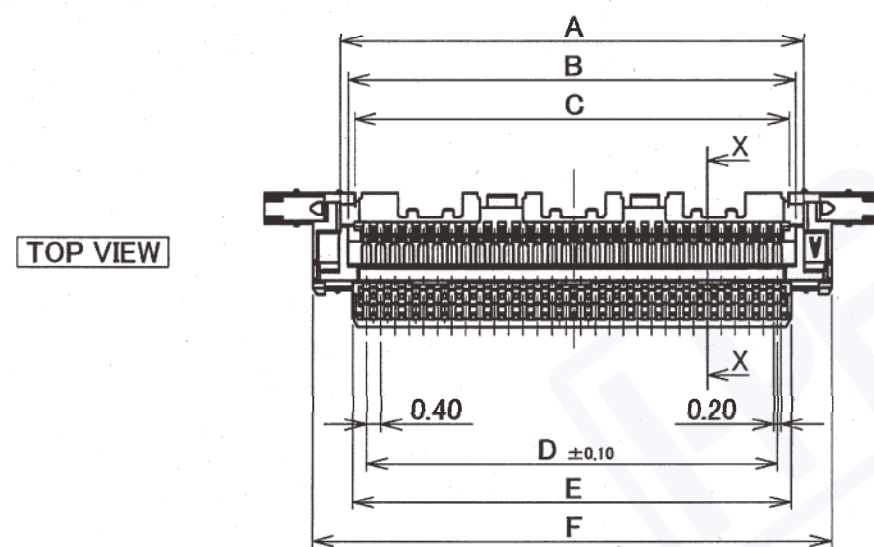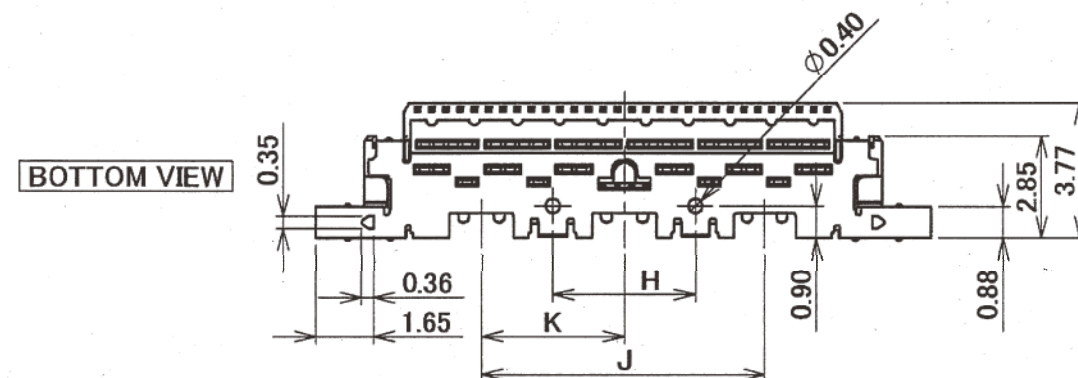

SECT. X-X
(S=15/1)

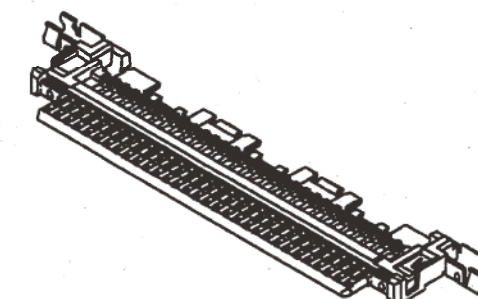

NOTES.

1. MATERIAL
HOUSING : HEAT RESISTING PLASTICS, UL94V-0, BLACK
CONTACT : COPPER ALLOY / Au PLATING
SHELL B : COPPER ALLOY / Au PLATING
2. THIS PART IS ASSEMBLED WITH SHELL A(P/N 2764-0**1-###) AFTER SOLDERED THE CABLE, AND IT BECOMES P/N 20633-2**T-0#S
3. PRODUCT SPECIFICATION : No. PRS-1968
4. TO ASSEMBLE AND SOLDER THIS CONNECTOR, YOU MUST READ AND FOLLOW THE ASSEMBLY MANUAL BELOW.
ASSEMBLY MANUAL : No. ASM-09005
5. RoHS Compliant

I-PEX DAI-ICHI SEIKO CO.,LTD.
I-PEX Business Company

TITLE CABLINE-CA
PLUG HOUSING ASS'Y
TYPE34

SCALE	UNIT	DWG. No.	SHEET	REV.
5:1	mm	20634	1/1	2

GENERAL TOLERANCE	
6 MAX.	±0.2
6 OVER MAX. 30	±0.3
30 OVER MAX. 120	±0.5
ANGLE	±2°

Confidential III C

SERIES No. R0

CUSTOMER
COPY



QKE-DFE06-02 REV.7