







Recommended P/N 3204-0**1

PART NO.	Pos.	A	B	C	D	E	F	G
3204-0201	20	13.40	7.88	10.66	2.50	5.00	25.00	21.00
3204-0301	30	17.40	11.88	14.66	3.00	9.00	30.00	25.00
3204-0401	40	21.40	15.88	18.66	3.25	13.00	35.00	29.00
3204-0501	50	25.40	19.88	22.66	3.40	17.00	40.00	33.00
3204-0601	60	29.40	23.88	26.66	4.00	20.00	40.00	37.00



TOP VIEW

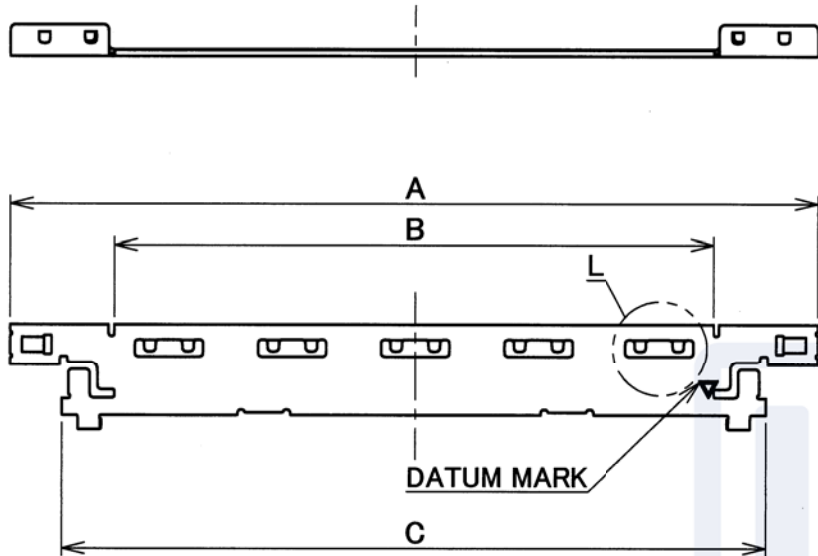

BOTTOM VIEW

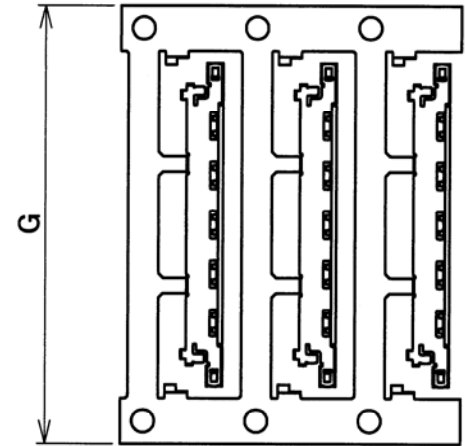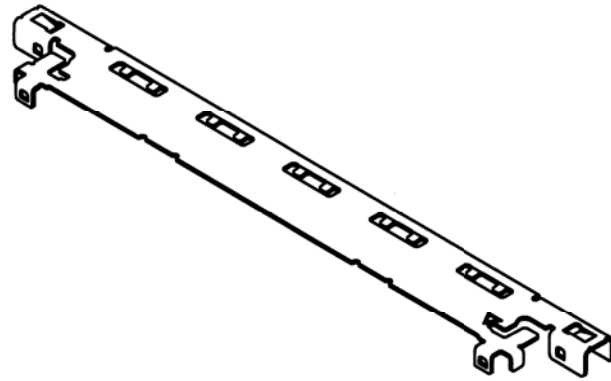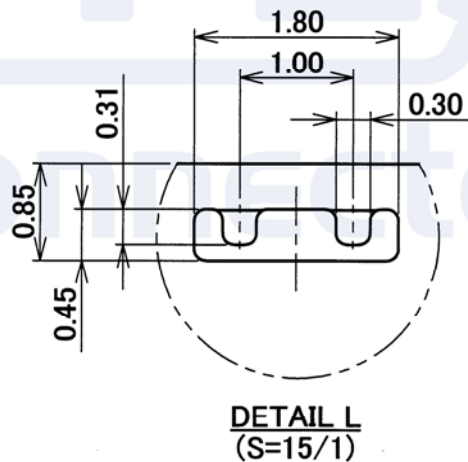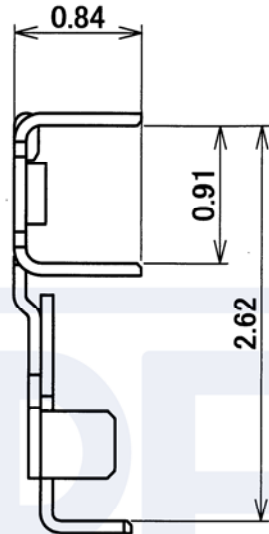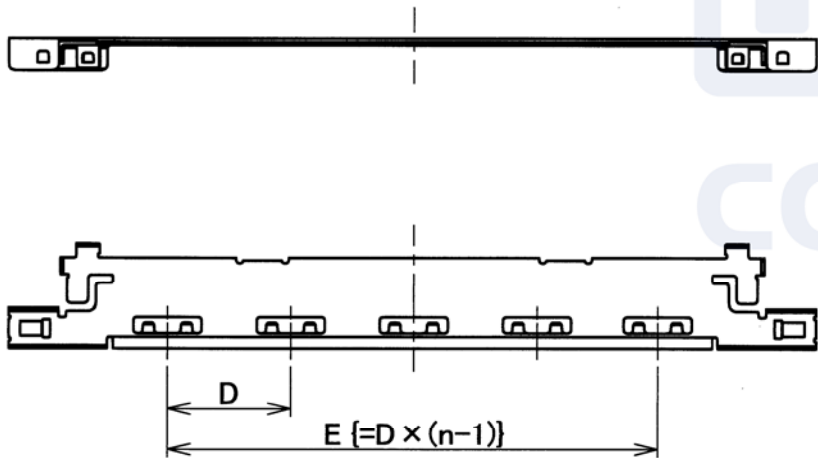

VIEW J
(S=2/1)

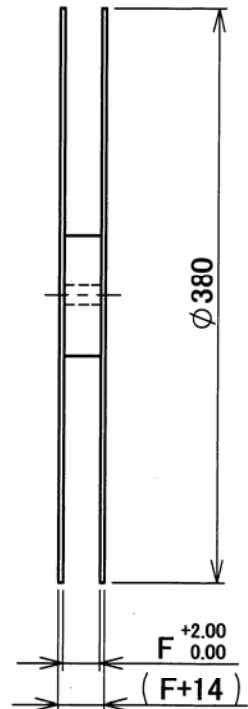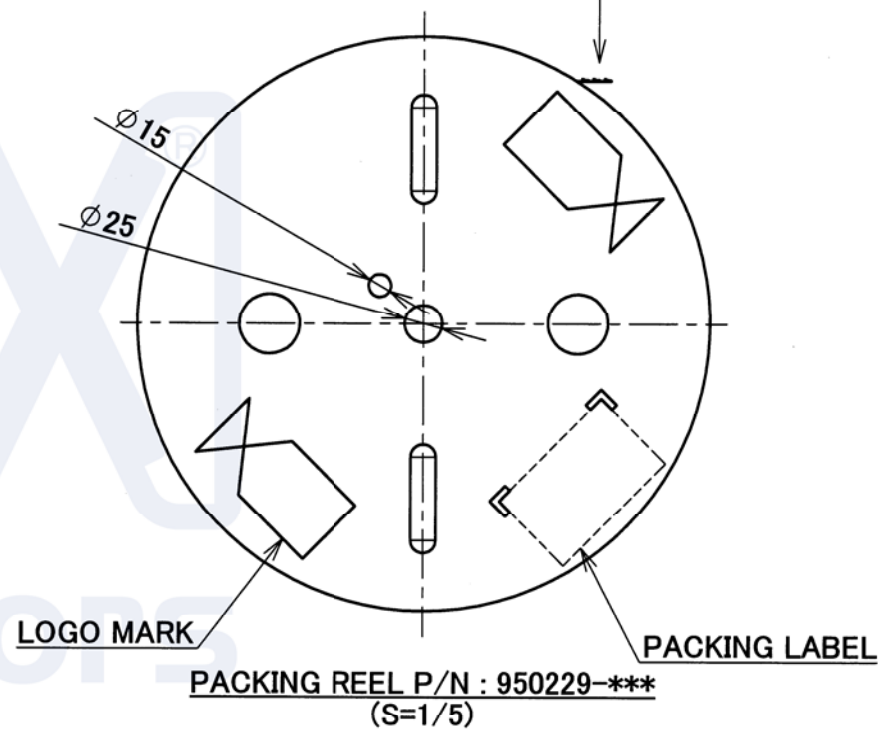

- NOTES.
- MATERIAL & FINISH
COPPER ALLOY t=0.08
PLATING : Ni
 - RoHS Compliant
 - PRODUCT SPECIFICATION :
CABLINE-CA II DOCUMENT No. PRS-2163
CABLINE-CA II PLUS DOCUMENT No. PRS-2261
INSTRUCTION MANUAL :
CABLINE-CA II DOCUMENT No. HIM-15033
CABLINE-CA II PLUS DOCUMENT No. HIM-16028



TITLE
CABLINE-CA II, CABLINE-CA II PLUS
PLUG SHELL A

GENERAL TOLERANCE	
6 MAX.	±0.2
6 OVER MAX. 30	±0.3
30 OVER MAX. 120	±0.5
ANGLE	±2°

PATENT PENDING

SERIES No. R1

CUSTOMER
COPY

PROJECTION
⊕

SCALE
5:1

UNIT
mm

DWG. No.

3204

SHEET
1/1

REV.
5