
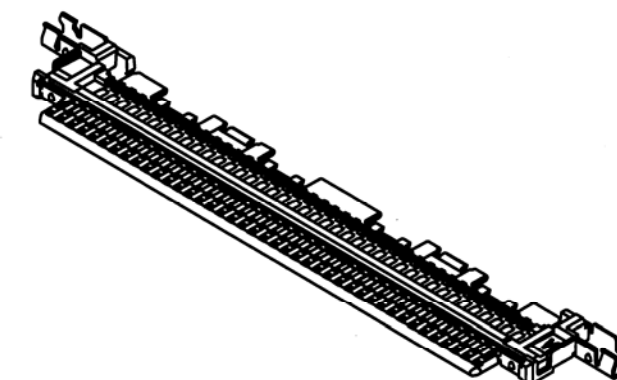
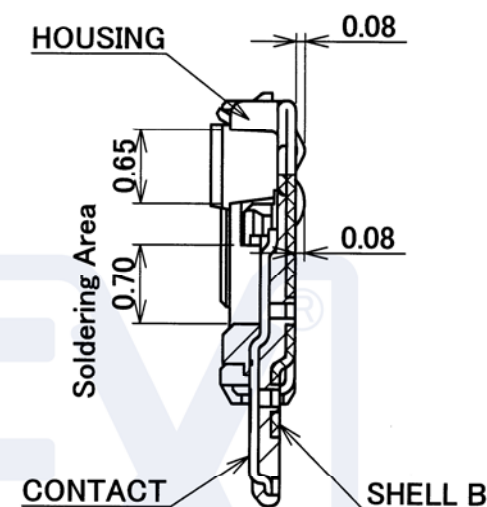

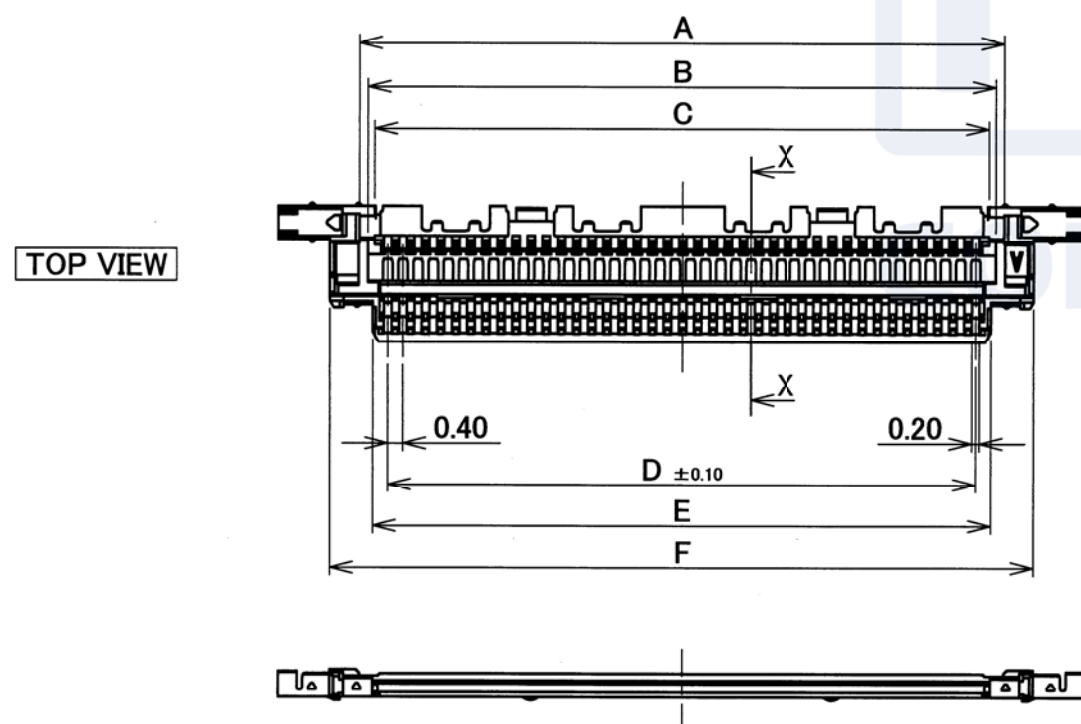



Recommended P/N 20680-0**T-01

PART NO.	Pos.	A	B	C	D	E	F	G	H	J
20680-020T-01	20	9.10	8.65	8.30	7.60	8.40	10.66	13.40	-	5.00
20680-030T-01	30	13.10	12.65	12.30	11.60	12.40	14.66	17.40	4.00	8.00
20680-040T-01	40	17.10	16.65	16.30	15.60	16.40	18.66	21.40	8.00	12.00
20680-050T-01	50	21.10	20.65	20.30	19.60	20.40	22.66	25.40	12.00	16.00
20680-060T-01	60	25.10	24.65	24.30	23.60	24.40	26.66	29.40	16.00	20.00

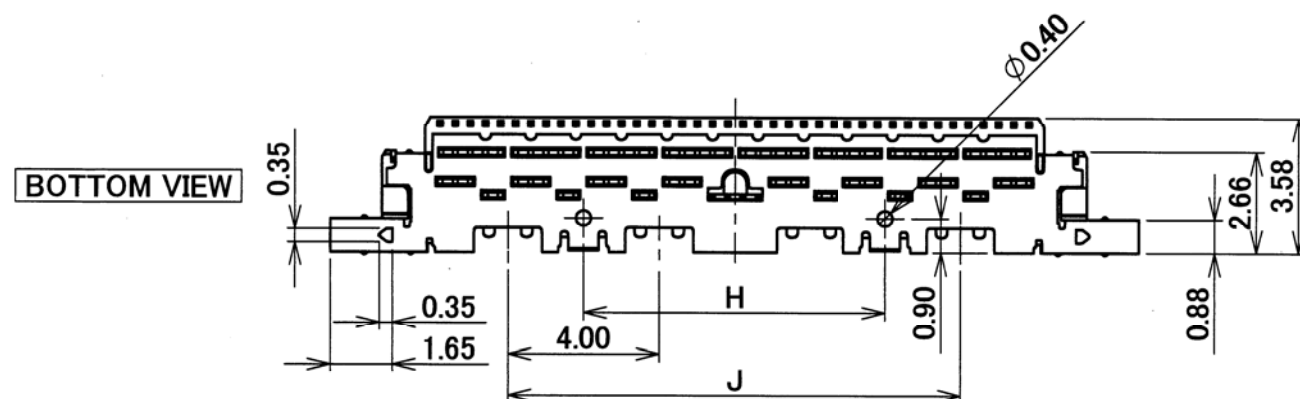

NOTES.

1. MATERIAL
HOUSING : HEAT RESISTING PLASTICS(RED PHOSPHORUS FREE), UL94V-0, BLACK
CONTACT : COPPER ALLOY / Au OVER Ni
SHELL B : COPPER ALLOY / Ni
2. THIS PART IS ASSEMBLED WITH SHELL A(P/N 3204-0**1) AND LOCK BAR ASS'Y(P/N 20681-0**T-01) AFTER SOLDERED THE CABLE, AND IT BECOMES P/N 20679-0**T-01
3. THIS PART IS ASSEMBLED WITH SHELL A(P/N 3204-0**1) AND LOCK BAR ASS'Y(P/N 20789-0**T-01) AFTER SOLDERED THE CABLE, AND IT BECOMES P/N 20788-0**T-01
4. RoHS Compliant
5. PRODUCT SPECIFICATION :
CABLINE-CA II DOCUMENT No. PRS-2163
CABLINE-CA II PLUS DOCUMENT No. PRS-2261
INSTRUCTION MANUAL :
CABLINE-CA II DOCUMENT No. HIM-15033
CABLINE-CA II PLUS DOCUMENT No. HIM-16028

GENERAL TOLERANCE	
6 MAX.	±0.2
6 OVER MAX. 30	±0.3
30 OVER MAX. 120	±0.5
ANGLE	±2°

PATENT PENDING

SERIES No.

R0

CUSTOMER
COPY



SCALE
5:1

UNIT
mm

DWG. No.

20680

SHEET
1/1

REV.
5

I-PEX by DAH-CHI SEIKO

TITLE
CABLINE-CA II, CABLINE-CA II PLUS
PLUG HOUSING ASS'Y

Confidential C